



om | Momentum Collection



om | smart seating

beep | bravo II | eon epu | faux felt | flock | fuse | lens | origin | syntax | whit epu

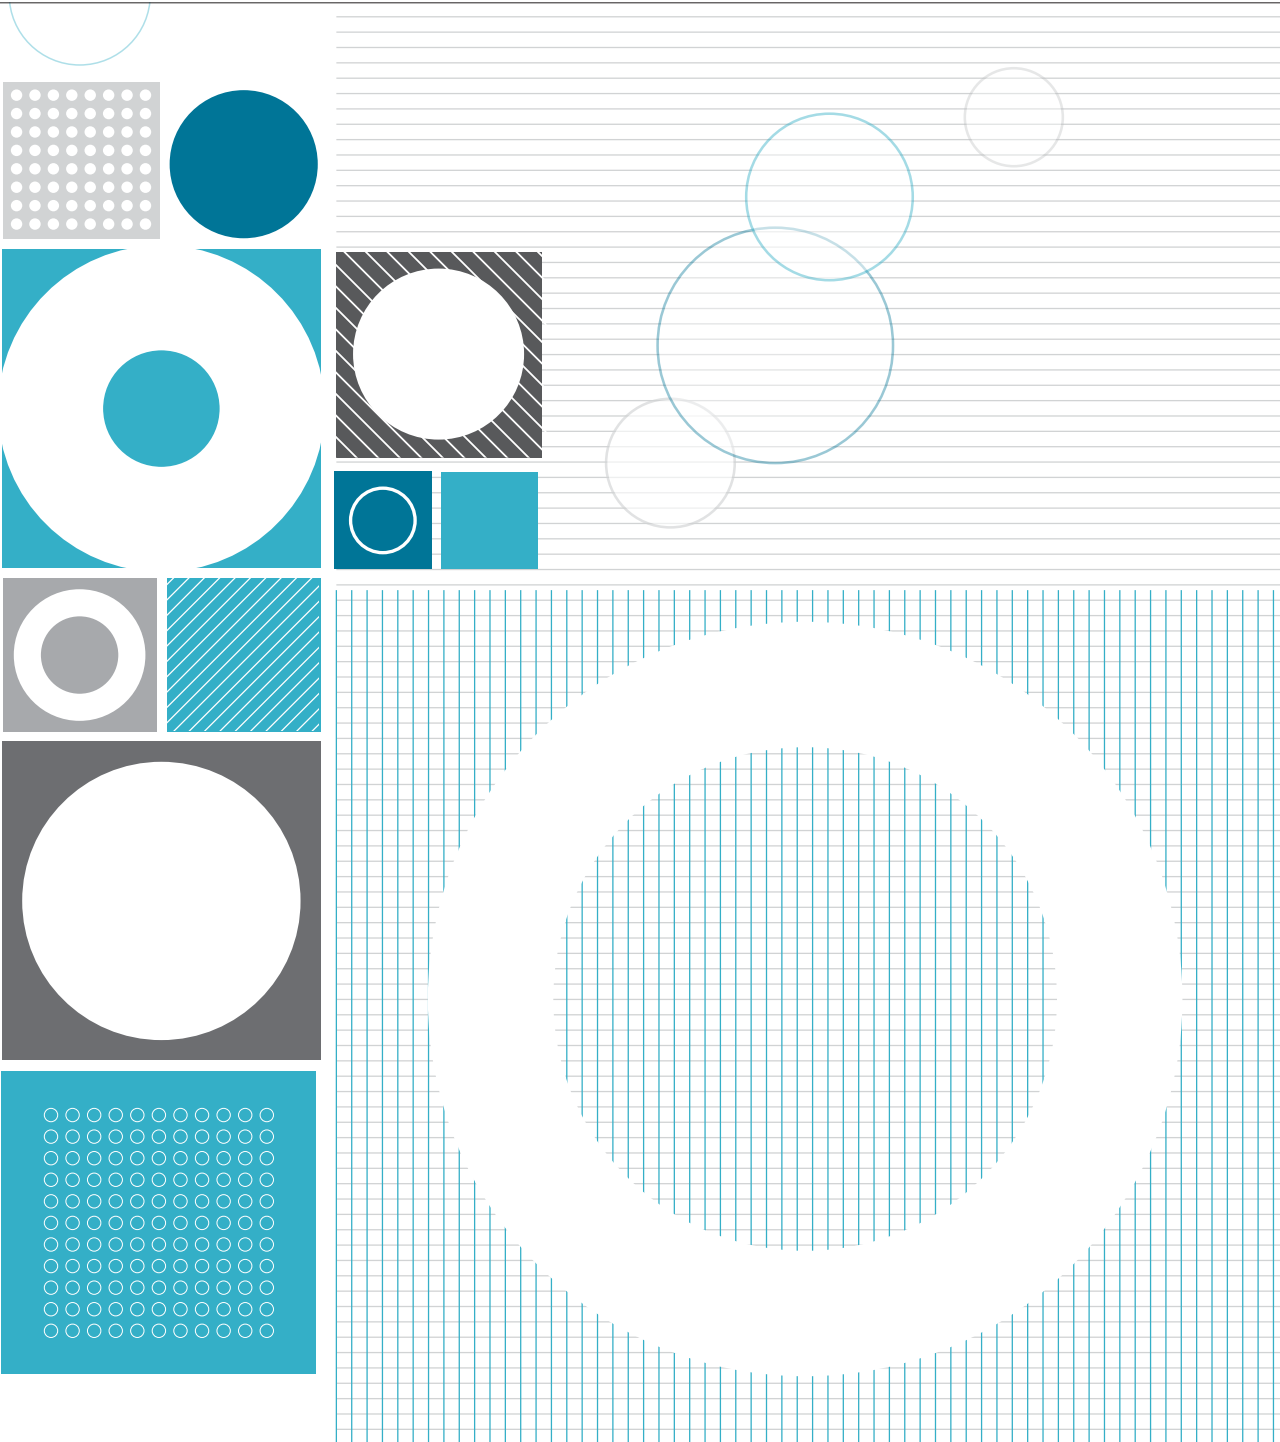


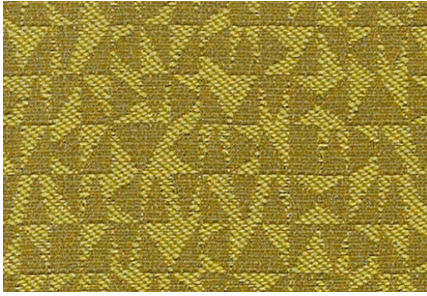

SYNTAX PLANT



NECTAR




TURQUOISE



PEWTER




SHALE



HUDSON




ASPHALT

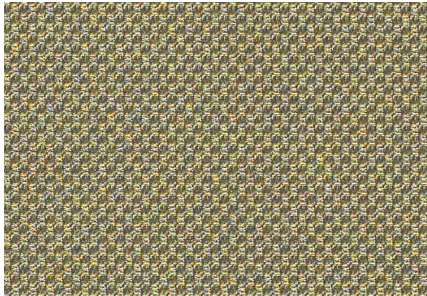


EON EPU ANEW



COQUETTE



GOLDMINE



MINERAL



COVE




ATLANTIC



TYPOGRAPHIC



FAUX FELT SPROUT



PEBBLE



POOL




FLANNEL




LAGOON



CORAL




CHARCOAL

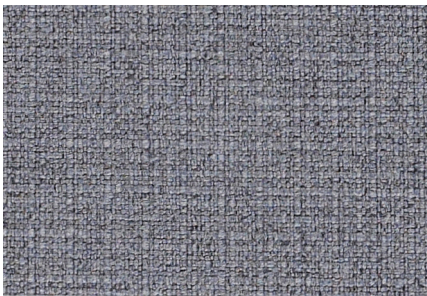


FLOCK NAUTICAL



FLANNEL




HARP



FERN




HEARTH




RUBY




BALTIC

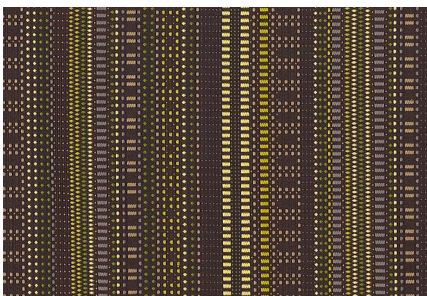


BEEP GREENLIGHT




FLAX




PONTOON




STEEL




FURNACE




BRIDGE



JET

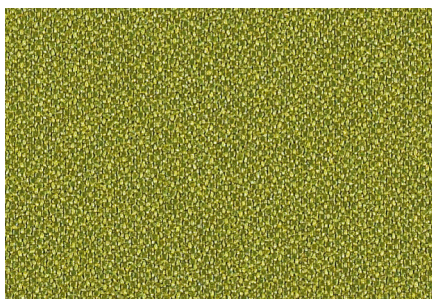


ORIGIN GAIA



MIKAN




ARUNDEL




POPPY




SODALITE



MALT




AMETHYST

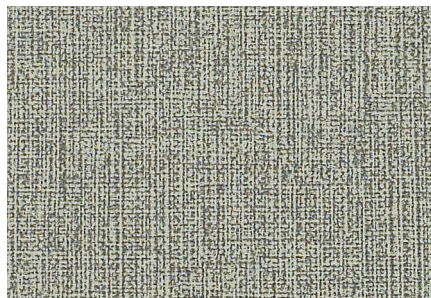

WHIT EPU CASTLE




HUMBLE



SMITH



BAY



CROWN




OCEAN




STORM




FUSE LUNAR




CRESS




PRISTINE



CARMINE



AZUREAN



WALNUT




PEPPER



BRAVO II GRAYSTONE



TWILIGHT




DUSK




IRON



DRIFTWOOD




SADDLE



NIGHT



LENS GRAPHITE



SAND




TERRA



NAVY



SILVER



CRIMSON



NIGHT



om | Momentum Collection

Pattern/ Width	Content and Backing	Weight/ Linear Yd.	Pattern Repeat	Finish	Abrasion (Wyzenbeek)	Breaking Strength	Crocking	Light Fastness	Flammability	Cleaning Code	Grade
Beep <i>Directional</i>	50% Post Consumer Recycled Polyester, 50% Polyester Backing: Acrylic	15.68 oz./ lin. yd.	0.625"L 15"W	none	70,000 Double Rubs	warp: 247 lbs. Fill: 254	Dry: class 4.5 min. wet: class 4.5 min.	40 hours	Passes Cal 117- 2013; NFPA 260/ UFAC Class 1	WS	E+30
Bravo II	100% Polyurethane / PVC Free Backing: Polyester	24.64 oz./ lin. yd.	none	none	500,000 Double Rubs	warp: 97 lbs. Fill: 84	Dry: class 4.5 min. wet: class 4 min.	200 hours	Passes Cal 117- 2013; NFPA 260/ UFAC Class 1	BC (4:1), W	E+15
Eon EPU	100% EPU Polyurethane Backing: Polyester	27.2 oz./ lin. yd.	0.625"L 0.625"W	none	900,000 Double Rubs	warp: 32.2 lbs. Fill: 9.5	Dry: class 5 min. wet: class 5 min.	200 hours	Passes Cal 117- 2013; NFPA 260/ UFAC Class 1	BC (4:1), W	D
Faux Felt	62% Repreve® Post Consumer Recycled Polyester, 38% Polyester Backing: None	17.12 oz./ lin. yd.	none	Crypton® Green	75,000 Double Rubs	warp: 215 lbs. Fill: 198	Dry: class 4.5 min. wet: class 4.5 min.	40 hours	Passes Cal 117- 2013; NFPA 260/ UFAC Class 1	BC (10:1), WS	E+15
Flock	53% Recycled Polyester, 47% Polyester Backing: None	16.16 oz./ lin. yd.	none	Crypton® Green	140,000 Double Rubs	warp: 179 lbs. Fill: 147	Dry: class 5 min. wet: class 5 min.	40 hours	Passes Cal 117- 2013; NFPA 260/ UFAC Class 1	BC (10:1), W	E+15
Fuse	65% Post Industrial Recycled Polyester, 35% Post Consumer Recycled Polyester Backing: Latex	12.48 oz./ lin. yd.	none	none	100,000 Double Rubs	warp: 243.4 lbs. Fill: 260.8	Dry: class 4 min. wet: class 4.5 min.	40 hours	Passes Cal 117- 2013; NFPA 260/ UFAC Class 1	WS	B
Lens <i>Directional</i>	81% Repreve® Post Consumer Recycled Polyester, 19% Recycled Polyester Backing: Acrylic	16.96 oz./ lin. yd.	10"L 7.5"W	none	110,000 Double Rubs	warp: 271 lbs. Fill: 413	Dry: class 5 min. wet: class 5 min.	40 hours	Passes Cal 117- 2013; NFPA 260/ UFAC Class 1	W	E
Origin	100% Post Consumer Recycled Polyester Backing: Acrylic	15.2 oz./ lin. yd.	none	none	282,000 Double Rubs	warp: 382 lbs. Fill: 324	Dry: class 5 min. wet: class 5 min.	40 hours	Passes Cal 117- 2013; NFPA 260/ UFAC Class 1	WS	B
Syntax <i>Directional</i>	50% Post Consumer Recycled Polyester, 50% Polyester Backing: Acrylic	13.6 oz./ lin. yd.	6.25"L 7.125"W	none	115,000 Double Rubs	warp: 222 lbs. Fill: 261	Dry: class 4.5 min. wet: class 4.5 min.	40 hours	Passes Cal 117- 2013; NFPA 260/ UFAC Class 1	WS	C
Whit EPU	100% EPU Polyurethane Backing: Polyester	24 oz./ lin. yd.	none	none	500,000 Double Rubs	warp: 11.6 lbs. Fill: 9.4	Dry: class 5 min. wet: class 5 min.	200 hours	Passes Cal 117- 2013; NFPA 260/ UFAC Class 1	BC (4:1), W	E

*All patterns are Reduced Environmental Impact, GREENGUARD Certified; PVC Free

CLEANING INFORMATION**BC – Bleach Cleanable:** 1 part bleach, 9 parts water = 10% bleach, 90% water solution. Do not clean/disinfect fabric for longer than 10 minutes using the 10% bleach solution. Always rinse promptly with clean water after applying the bleach solution. Failure to do so will void any and all warranties.**W - Water-Based Cleaner:** Spot clean, using the foam only from a water-based cleaning agent, such as a mild detergent or non-solvent upholstery shampoo product. Apply foam with a soft brush in a circular motion. Always rinse promptly with clean water. Vacuum when dry. Pretest small area before proceeding.**WS – Water/Solvent Cleaner:** Spot clean with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well-ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding. Always rinse promptly with clean water.**ADDITIONAL INFORMATION****Cal TB 133:** All patterns may comply with California Technical Bulletin 133 when combined with appropriate components.**^Abrasion:** Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be a reliable indicator of increased fabric lifespan.**Specifications:** Specifications are correct at the time of printing. Current detailed specifications are available on the Momentum website.

*This term and any corresponding data refer to typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.