



connect your story

om | fabric essentials in-stock

softsit

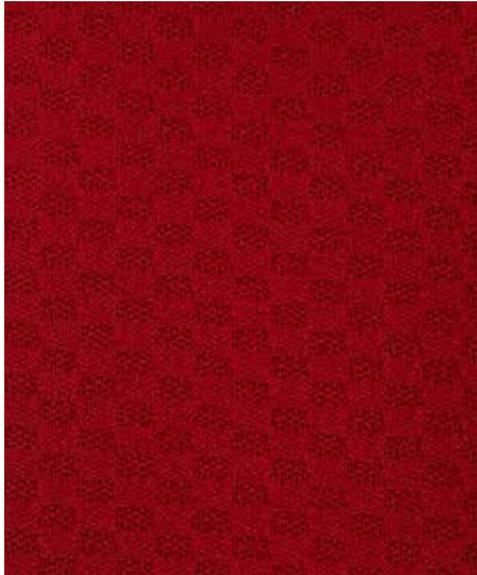

molten 2577



milos 2585



etna 2588



bali 2589



kelvin 2574



salina 2582




basalt 2571



graphene 2570

clue

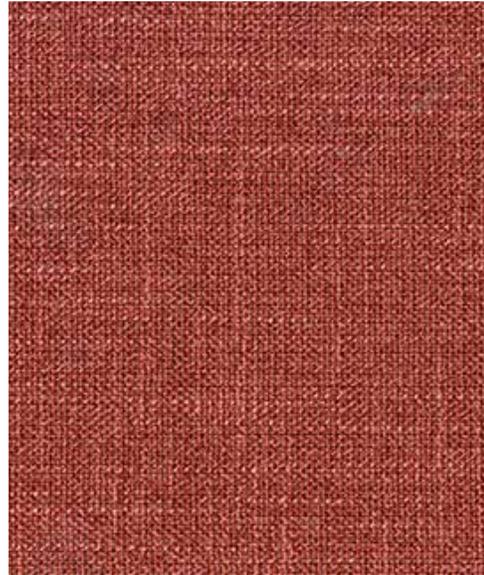

clouseau 2407



hardy 2404




drew 2406



friday 2408




agatha 2409



marlowe 2402



tracy 2403



spade 2400



sherlock 2401

softsit

| | | | |
|--|--|--|---|
| Content: 100% Polyester Width: 58" / 59" usable Weight: 17.87 ± 1.0 oz. / linear yard Backing: None Finish: None Repeat: None | PERFORMANCE Surface Abrasion: Breaking Strength: Colorfastness to Crocking: Colorfastness to Light: | Test method ASTM D4157 (Cotton Duck) ASTM D5034 AATCC 8 AATCC 16.3 Option 3 | Results 110,000 Double Rubs Warp: 199 lbs. / Fill: 199 lbs. Dry: Class 4 / Wet: Class 3 Grade 40 hours - Grade 4 |
| Flammability* California TB 117-2013 Sec. 1 Passes | Cleaning Code: Cleaning Information: | WS: (Water/Solvent Cleaner) <ul style="list-style-type: none"> Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. | |

clue

| | | | |
|--|--|---|--|
| Content: 79% Polyester, 21% Rayon Width: 54" Weight: 9.0 oz. / linear.yd. Backing: 100% Polyester non-woven scrim Finish: i-clean soil and stain repellent Directional Yes Railroaded: No | PERFORMANCE Surface Abrasion: Breaking Strength: Colorfastness to Crocking: Colorfastness to Light: | Test method ASTM D4157 (Cotton Duck) ASTM D5034 AATCC 8 AATCC16A | Results 75,000 Double Rubs Warp: 152 lbs. / Fill: 116 lbs. Dry: Class 4 / Wet: Class 3 40 hours – Class 4 |
| Flammability* California TB 117-2013 Sec. 1 Passes UFAC Class 1 Passes NFPA 260, Class 1 Passes | Cleaning Code: Cleaning Information: | W (Water-Based Cleaner) <ul style="list-style-type: none"> Spot clean only with water-based upholstery shampoo or foam upholstery cleaner. Pretest a small, inconspicuous area before proceeding. Do not over wet. Do not use solvents to spot clean. Cushion covers should not be removed and laundered. When cleaning a spill, blot immediately to remove the spilled content. Evenly clean the entire panel in a seam to seam fashion. | |

Additional Notes

*This term and any corresponding data refer to typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

Individual samples available. Please send requests to samples@omseating.com

Manufacturers will always attempt to ship to a satisfactory commercial match. Because of industry standard dye lot variation, colors may not match exactly. Specifications are correct at time of printing and are subject to change without notification. Additional specifications may be available by contacting OM.

Visit www.omseating.com for more information about ergonomics and the design of om | seating.