

om commercial-contract basics in-stock

om commercial-contract basics in-stock



2025 UPDATE:


CELESTIAL DISCONTINUED COLORS:
1207 Hyperion, 1208 Europa, 1203 Callisto

SPICE COLORS PHASING OUT:
1166 Sesame, and 1168 Mint

TYPE PATTERN DISCONTINUED

basic | celestial | spice | type

basic | celestial | spice | type

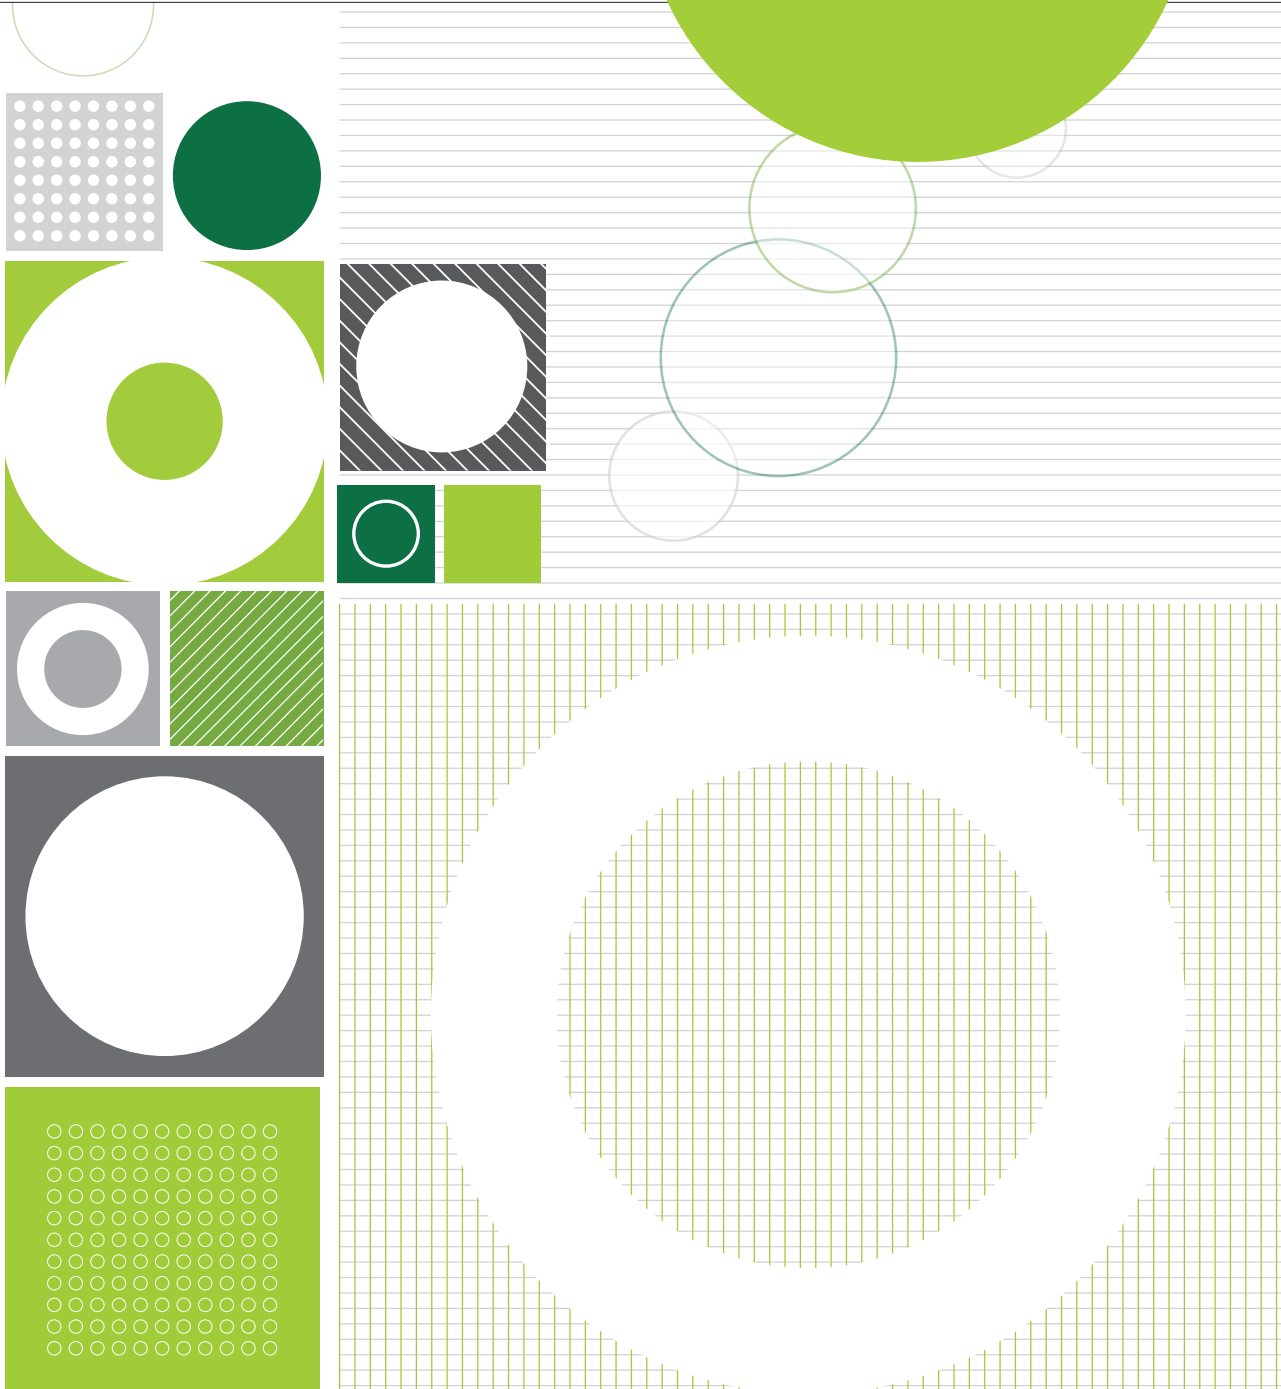

basic

Content: 100% Marquesa* Lana	PERFORMANCE	TEST METHOD	RESULTS
Width: 54"	Surface Abrasion: ASTM D-4157 (Wire Screen)	ASTM D-4157 (Wire Screen)	250,000 Double Rubs
Weight: 16.0 oz./linear yard	Breaking Strength: ASTM D-5034	ASTM D-5034	Warp: 300 lbs / Fill: 300 lbs
Backing: Acrylic	Seam Slippage: ASTM D-4034	ASTM D-4034	Warp: 91.3 lbs / Fill: 95 lbs
Finish: Teflon*	Colorfastness to Crocking: AATCC 8	AATCC 8	Dry: Class 5 / Wet: Class 5
Repeat: None	Colorfastness to Light: AATCC 16E	AATCC 16E	400 hrs. - Class 5
Directional: No			
Railroaded: No			

Flammability*	Cleaning Code:	WS (Water/Solvent Cleaner)
California TB 117-2013, Section 1	Cleaning Instructions:	<ul style="list-style-type: none"> For water based stains, use mild detergent foam or upholstery shampoo. For oil based stains, spot clean with a dry cleaning solvent. Always test an area first
CS-191-53, Class 1		
BIFMA X5.7-1991		
NFPA 260 (Equivalent to UFAC) Class 1		
Passes		
Passes		
Passes		
Passes		

celestial

Content: 100% Polyester	PERFORMANCE	TEST METHOD	RESULTS
Width: 54"	Surface Abrasion: ASTM D-4157 (Wyzenbeek)	ASTM D-4157 (Wyzenbeek)	Passes 183,000 Double Rubs
Weight: 14.2 oz./linear yard	Breaking Strength: ASTM-D-5034	ASTM-D-5034	Warp: 395.2 lbs. / Fill: 298 lbs.
Backing: Acrylic	Seam Slippage: ASTM-D-4034	ASTM-D-4034	Warp: 81 lbs. / Fill: 70 lbs.
Finish: Stain Repellent	Colorfastness to Crocking: AATCC 8	AATCC 8	Dry: Class 4 min / Wet: Class 4
Repeat: None	Colorfastness to Light: AATCC-16	AATCC-16	40 hours - Class 4
Directional: No			
Railroaded: No			

Flammability*	Cleaning Code:	WS (Water/Solvent Cleaner)
California TB 117-2013	Cleaning Instructions:	<ul style="list-style-type: none"> Spot clean, using a mild water-free solvent or dry cleaning product. Clean only in a well-ventilated room and avoid any product containing carbon tetrachloride or other toxic materials. Pretest a small area before proceeding. Always rinse promptly with clean water.
NFPA 260 (Equivalent to UFAC)		
ASTM E84 (Adhered) Class 2 or B		
Passes		
Passes		
Passes		

spice

Content: 100% Recycled Polyester	PERFORMANCE	TEST METHOD	RESULTS
Width: 54"	Surface Abrasion: ASTM-D-4157 (Wyzenbeek)	ASTM-D-4157 (Wyzenbeek)	400,000 Double Rubs
Weight: 11.5 oz./linear yard	Breaking Strength: ASTM-D-5034	ASTM-D-5034	Warp: 300 lbs / Fill: 220.0 lbs.
Backing: Acrylic	Seam Slippage: ASTM-D-4034	ASTM-D-4034	Warp: 87.0 lbs / Fill: 87.0 lbs.
Finish: Teflon*	Colorfastness to Crocking: AATCC 8	AATCC 8	Dry: Class 5 / Wet: Class 5
Repeat: None	Colorfastness to Light: AATCC 16E	AATCC 16E	60 hours - class 5
Directional: No			
Railroaded: No			

Flammability*	Cleaning Code:	WS (Water/Solvent Cleaner)
California TB 117-2013, Section 1	Cleaning Instructions:	<ul style="list-style-type: none"> For water based stains, use mild detergent foam or upholstery shampoo. For oil based stains, spot clean with a dry cleaning solvent. Always test an area first.
CS-191-53, Class 1		
BIFMA X5.7-1991		
NFPA 260 (Equivalent to UFAC), Class 1		
Passes		
Passes		
Passes		

type **DISCONTINUED**

Content: 90% polyester, 6% pre-consumer recycled polyester, 4% post-consumer recycled polyester	PERFORMANCE	TEST METHOD	RESULTS
Width: 54"	Surface Abrasion: ASTM D4157 (Cotton Duck)	ASTM D4157 (Cotton Duck)	100,000 Double Rubs
Weight: 12.9 ± 1.0 oz./lin. yard	Breaking Strength: ASTM D5034	ASTM D5034	Warp: 200 lbs. / Fill: 155 lbs.
Backing: Acrylic	Seam Slippage: ASTM D4034	ASTM D4034	Warp: 100 lbs. / Fill: 45 lbs
Finish: Stain Repellent	Colorfastness to Crocking: AATCC 8	AATCC 8	Dry: Grade 4 min. / Wet: Grade 3 min.
Repeat: 1.5" vertical 2" horizontal	Colorfastness to Light: AATCC 16 Option 3	AATCC 16 Option 3	Grade 4 min. at 40 hours
Directional: yes			
Railroaded: no			

Flammability*	Cleaning Code:	WS (Water/Solvent Cleaner)
California TB 117-2013, Section 1	Cleaning Instructions:	<ul style="list-style-type: none"> Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.
NFPA 260 (Equivalent to UFAC)		
Passes		
Passes		

Additional Notes: Individual samples available. Manufacturers will always attempt to ship to a satisfactory commercial match. Because of industry standard dye lot variation, colors may not match exactly. Specifications are correct at time of printing and are subject to change without notification. Additional specifications may be available by contacting OM.

*This term and any corresponding data refer to typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

Visit www.omseating.com for more information about ergonomics and the design of omseating.