omseating

2026 UPDATE:

BASIC UPDATED to BASIC 2.0

CELESTIAL DISCONTINUED COLORS: 1207 Hyperion, 1208 Europa, 1203 Callisto

SPICE PATTERN DISCONTINUED

TYPE PATTERN DISCONTINUED

basic | celestial | spice | type

basic | celestial | spice | type

omseating

GRADE 1

om | commercial-contract basics in-stock

basic

Content:	100% Marquesa® Lana
Width:	54"
Weight:	16.0 oz./linear yard
Backing:	Acrylic
Finish:	Teflon®
Repeat:	None
Directional:	No
Railroaded:	No

PERFORMANCE	**TEST METHOD**	**RESULTS**
Surface Abrasion:	ASTM D-4157 (Wire Screen)	250,000 Double Rubs
Breaking Strength:	ASTM D-5034	Warp: 300 lbs / Fill: 300 lbs
Seam Slippage:	ASTM D-4034	Warp: 91.3 lbs / Fill: 95 lbs
Colorfastness to Crocking:	AATCC 8	Dry: Class 5 / Wet: Class 5
Colorfastness to Light:	AATCC 16E	400 hrs. - Class 5

Flammability*

California TB 117-2013, Section 1	Passes
CS-191-53, Class 1	Passes
BIFMA X5.7-1991	Passes
NFPA 260 (Equivalent to UFAC) Class 1	Passes

Cleaning Code: **WS** (Water/Solvent Cleaner)

Cleaning Instructions:
- For water based stains, use mild detergent foam or upholstery shampoo.
- For oil based stains, spot clean with a dry cleaning solvent.
- Always test an area first

celestial

Content:	100% Polyester
Width:	54"
Weight:	14.2 oz./linear yard
Backing:	Acrylic
Finish:	Stain Repellent
Repeat:	None
Directional:	No
Railroaded:	No

PERFORMANCE	**TEST METHOD**	**RESULTS**
Surface Abrasion:	ASTM D-4157 (Wyzenbeek)	Passes 183,000 Double Rubs
Breaking Strength:	ASTM-D-5034	Warp: 395.2 lbs. / Fill: 298 lbs.
Seam Slippage:	ASTM-D-4034	Warp: 81 lbs. / Fill: 70 lbs.
Colorfastness to Crocking:	AATCC 8	Dry: Class 4 min / Wet: Class 4
Colorfastness to Light:	AATCC-16	40 hours - Class 4

GREENGUARD Gold Certified

Flammability*

California TB 117-2013	Passes
NFPA 260 (Equivalent to UFAC)	Passes
ASTM E84 (Adhered) Class 2 or B	Passes

Cleaning Code: **WS** (Water/Solvent Cleaner)

Cleaning Instructions:
- Spot clean, using a mild water-free solvent or dry cleaning product.
- Clean only in a well-ventilated room and avoid any product con taining carbon tetrachloride or other toxic materials.
- Pretest a small area before proceeding. Always rinse promptly with clean water.

spice **DISCONTINUED**

Content:	100% Recycled Polyester
Width:	54"
Weight:	11.5 oz./linear yard
Backing:	Acrylic
Finish:	Teflon®
Repeat	None
Directional:	No
Railroaded:	No

PERFORMANCE	**TEST METHOD**	**RESULTS**
Surface Abrasion:	ASTM-D-4157 (Wyzenbeek)	400,000 Double Rubs
Breaking Strength:	ASTM-D-5034	Warp: 300 lbs / Fill: 220.0 lbs.
Seam Slippage:	ASTM-D-4034	Warp: 87.0 lbs / Fill: 87.0 lbs.
Colorfastness to Crocking:	AATCC 8	Dry: Class 5 / Wet: Class 5
Colorfastness to Light:	AATCC 16E	60 hours - class 5

Flammability*

California TB 117-2013, Section 1	Passes
CS-191-53, Class 1	Passes
BIFMA X5.7-1991	Passes
NFPA 260 (Equivalent to UFAC), Class 1	Passes

Cleaning Code: **WS (**Water/Solvent Cleaner)

Cleaning Instructions:
- For water based stains, use mild detergent foam or upholstery shampoo.
- For oil based stains, spot clean with a dry cleaning solvent.
- Always test an area first.

type **DISCONTINUED**

Content:	90% polyester, 6% pre-consumer recycled polyester, 4% postcon-sumer recycled polyester
Width:	54"
Weight:	12.9 ± 1.0 oz./lin. yard
Backing:	Acrylic
Finish:	Stain Repellent
Repeat:	1.5" vertical 2" horizontal
Directional:	yes
Railroaded:	no

PERFORMANCE	**TEST METHOD**	**RESULTS**
Surface Abrasion:	ASTM D4157 (Cotton Duck)	100,000 Double Rubs
Breaking Strength:	ASTM D5034	Warp: 200 lbs. / Fill: 155 lbs.
Seam Slippage:	ASTM D4034	Warp: 100 lbs. / Fill: 45 lbs
Colorfastness to Crocking:	AATCC 8	Dry: Grade 4 min. / Wet: Grade 3 min.
Colorfastness to Light:	AATCC 16 Option 3	Grade 4 min. at 40 hours

Flammability*

California TB 117-2013, Section 1	Passes
NFPA 260 (Equivalent to UFAC)	Passes

Cleaning Code: **WS** (Water/Solvent Cleaner)

Cleaning Instructions:
- Clean with water based cleaning agents, foam or pure, water free solvents.
- Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Additional Notes: Individual samples available. Manufacturers will always attempt to ship to a satisfactory commercial match. Because of industry standard dye lot variation, colors may not match exactly. Specifications are correct at time of printing and are subject to change without notification. Additional specifications may be available by contacting OM.

*This term and any corresponding data refer to typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

Visit www.**om**seating.com for more information about ergonomics and the design of **om**seating.

omseating 1110 south mildred avenue, ontario, california 91761 | www.**om**seating.com | 877.776.5678 | fax 909.392.4567

Now Replaced with Basic 2.0
Please call OM for more information

basic



burgundy 1013



blue 1005



navy 1004



gray 1002



charcoal 1001



black 1020

celestial



hyperion 1207*



europa 1208*



titan 1204



callisto 1203*



rhea 1201



oberon 1200

***DISCONTINUED COLORS:**

1207 Hyperion 1208
Europa
1203 Callisto

spice DISCONTINUED

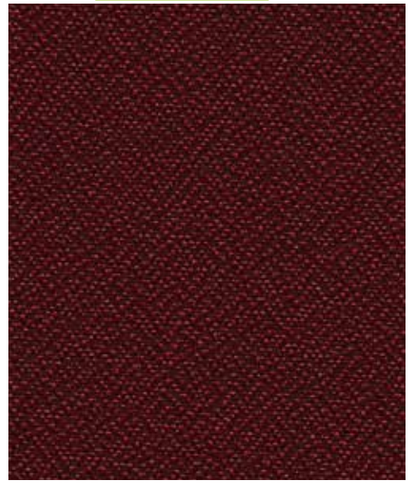

paprika 1167



mint 1168*



juniper 1164



sesame 1166*



nutmeg 1163



pepper 1161

type DISCONTINUED



fairy 1307



leaf 1308



ice 1305



steel 1301



electric 1306



aqua 1304



obsidian 1300